


Flat Top Chain Technical Data


Table 1: Straight Running Chains Single Hinge

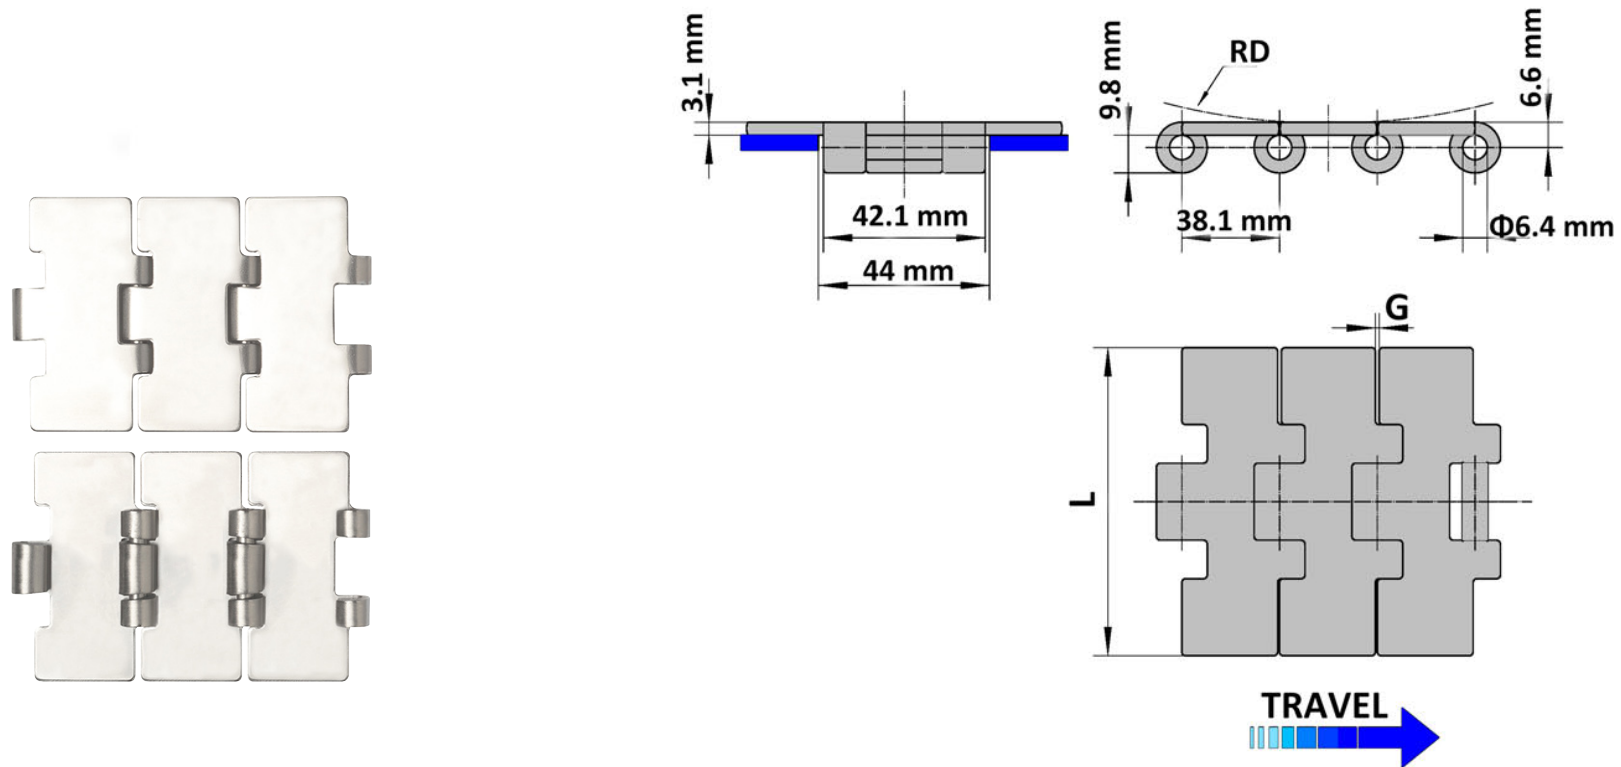

Item	Material	Chain Thickness	Chain Width	Pin Diameter	Pin Pitch	Mini. Backflex Radius	Pin overall width	Guide clearance
S815-K300	C45	0.12" (3.1 mm)	3" (76.2 mm)	0.25" (6.4 mm)	1.5" (38.1 mm)	5.9" (150 mm)	1.69" (42.9 mm)	1.75" (44.4 mm)
S815-K325	C45	0.12" (3.1 mm)	3.25" (82.6 mm)	0.25" (6.4 mm)	1.5" (38.1 mm)	5.9" (150 mm)	1.69" (42.9 mm)	1.75" (44.4 mm)
S815-K350	C45	0.12" (3.1 mm)	3.5" (88.9 mm)	0.25" (6.4 mm)	1.5" (38.1 mm)	5.9" (150 mm)	1.69" (42.9 mm)	1.75" (44.4 mm)
S815-K400	C45	0.12" (3.1 mm)	4" (101.6 mm)	0.25" (6.4 mm)	1.5" (38.1 mm)	5.9" (150 mm)	1.69" (42.9 mm)	1.75" (44.4 mm)
S815-K450	C45	0.12" (3.1 mm)	4.5" (114.3 mm)	0.25" (6.4 mm)	1.5" (38.1 mm)	5.9" (150 mm)	1.69" (42.9 mm)	1.75" (44.4 mm)


Item	Material	Chain Thickness	Chain Width	Pin Diameter	Pin Pitch	Mini. Backflex Radius	Pin overall width	Guide clearance
S815-K600	C45	0.12" (3.1 mm)	6" (152.4 mm)	0.25" (6.4 mm)	1.5" (38.1 mm)	5.9" (150 mm)	1.69" (42.9 mm)	1.75" (44.4 mm)
S815-K750	C45	0.12" (3.1 mm)	7.5" (190.5 mm)	0.25" (6.4 mm)	1.5" (38.1 mm)	5.9" (150 mm)	1.69" (42.9 mm)	1.75" (44.4 mm)
SS812-K325	Standard	0.12" (3.1 mm)	3.25" (82.6 mm)	0.25" (6.4 mm)	1.5" (38.1 mm)	5.9" (150 mm)	1.69" (42.9 mm)	1.75" (44.4 mm)
SSR812-K325	Standard	0.12" (3.1 mm)	3.25" (82.6 mm)	0.25" (6.4 mm)	1.5" (38.1 mm)	2.95" (75 mm)	1.69" (42.9 mm)	1.75" (44.4 mm)
SS812-K330	Standard	0.12" (3.1 mm)	3.3" (88.9 mm)	0.25" (6.4 mm)	1.5" (38.1 mm)	5.9" (150 mm)	1.69" (42.9 mm)	1.75" (44.4 mm)
SS812-K350	Standard	0.12" (3.1 mm)	3.5" (88.9 mm)	0.25" (6.4 mm)	1.5" (38.1 mm)	5.9" (150 mm)	1.69" (42.9 mm)	1.75" (44.4 mm)
SS812-K400	Standard	0.12" (3.1 mm)	4" (101.6 mm)	0.25" (6.4 mm)	1.5" (38.1 mm)	5.9" (150 mm)	1.69" (42.9 mm)	1.75" (44.4 mm)
SS812-K450	Standard	0.12" (3.1 mm)	4.5" (114.3 mm)	0.25" (6.4 mm)	1.5" (38.1 mm)	5.9" (150 mm)	1.69" (42.9 mm)	1.75" (44.4 mm)
SS812-K600	Standard	0.12" (3.1 mm)	6" (152.4 mm)	0.25" (6.4 mm)	1.5" (38.1 mm)	5.9" (150 mm)	1.69" (42.9 mm)	1.75" (44.4 mm)
SS812-K750	Standard	0.12" (3.1 mm)	7.5" (190.5 mm)	0.25" (6.4 mm)	1.5" (38.1 mm)	5.9" (150 mm)	1.69" (42.9 mm)	1.75" (44.4 mm)
SSE815-K300	Extra plus	0.12" (3.1 mm)	3" (76.2 mm)	0.25" (6.4 mm)	1.5" (38.1 mm)	5.9" (150 mm)	1.69" (42.9 mm)	1.75" (44.4 mm)
SSE815-K325	Extra plus	0.12" (3.1 mm)	3.25" (82.6 mm)	0.25" (6.4 mm)	1.5" (38.1 mm)	5.9" (150 mm)	1.69" (42.9 mm)	1.75" (44.4 mm)
SSE815-K330	Extra plus	0.12" (3.1 mm)	3.3" (88.9 mm)	0.25" (6.4 mm)	1.5" (38.1 mm)	5.9" (150 mm)	1.69" (42.9 mm)	1.75" (44.4 mm)
SSE815-K350	Extra plus	0.12" (3.1 mm)	3.5" (88.9 mm)	0.25" (6.4 mm)	1.5" (38.1 mm)	5.9" (150 mm)	1.69" (42.9 mm)	1.75" (44.4 mm)
SSE815-K400	Extra plus	0.12" (3.1 mm)	4" (101.6 mm)	0.25" (6.4 mm)	1.5" (38.1 mm)	5.9" (150 mm)	1.69" (42.9 mm)	1.75" (44.4 mm)
SSE815-K450	Extra plus	0.12" (3.1 mm)	4.5" (114.3 mm)	0.25" (6.4 mm)	1.5" (38.1 mm)	5.9" (150 mm)	1.69" (42.9 mm)	1.75" (44.4 mm)
SSE815-K600	Extra plus	0.12" (3.1 mm)	6" (152.4 mm)	0.25" (6.4 mm)	1.5" (38.1 mm)	5.9" (150 mm)	1.69" (42.9 mm)	1.75" (44.4 mm)
SSE815-K750	Extra plus	0.12" (3.1 mm)	7.5" (190.5 mm)	0.25" (6.4 mm)	1.5" (38.1 mm)	5.9" (150 mm)	1.69" (42.9 mm)	1.75" (44.4 mm)
SSE815-K325HB	Extra plus HB	0.12" (3.1 mm)	3.25" (82.6 mm)	0.25" (6.4 mm)	1.5" (38.1 mm)	5.9" (150 mm)	1.69" (42.9 mm)	1.75" (44.4 mm)
SSE815-K330HB	Extra plus HB	0.12" (3.1 mm)	3.3" (88.9 mm)	0.25" (6.4 mm)	1.5" (38.1 mm)	5.9" (150 mm)	1.69" (42.9 mm)	1.75" (44.4 mm)
SSA815-K325	Austenitic	0.12" (3.1 mm)	3.25" (82.6 mm)	0.25" (6.4 mm)	1.5" (38.1 mm)	5.9" (150 mm)	1.69" (42.9 mm)	1.75" (44.4 mm)
SSA815-K330	Austenitic	0.12" (3.1 mm)	3.3" (88.9 mm)	0.25" (6.4 mm)	1.5" (38.1 mm)	5.9" (150 mm)	1.69" (42.9 mm)	1.75" (44.4 mm)
SSA815-K350	Austenitic	0.12" (3.1 mm)	3.5" (88.9 mm)	0.25" (6.4 mm)	1.5" (38.1 mm)	5.9" (150 mm)	1.69" (42.9 mm)	1.75" (44.4 mm)
SSA815-K400	Austenitic	0.12" (3.1 mm)	4" (101.6 mm)	0.25" (6.4 mm)	1.5" (38.1 mm)	5.9" (150 mm)	1.69" (42.9 mm)	1.75" (44.4 mm)
SSA815-K450	Austenitic	0.12" (3.1 mm)	4.5" (114.3 mm)	0.25" (6.4 mm)	1.5" (38.1 mm)	5.9" (150 mm)	1.69" (42.9 mm)	1.75" (44.4 mm)
SSA815-K600	Austenitic	0.12" (3.1 mm)	6" (152.4 mm)	0.25" (6.4 mm)	1.5" (38.1 mm)	5.9" (150 mm)	1.69" (42.9 mm)	1.75" (44.4 mm)
SSA815-K750	Austenitic	0.12" (3.1 mm)	7.5" (190.5 mm)	0.25" (6.4 mm)	1.5" (38.1 mm)	5.9" (150 mm)	1.69" (42.9 mm)	1.75" (44.4 mm)

Table 2: Straight Running Chains Double Hinge

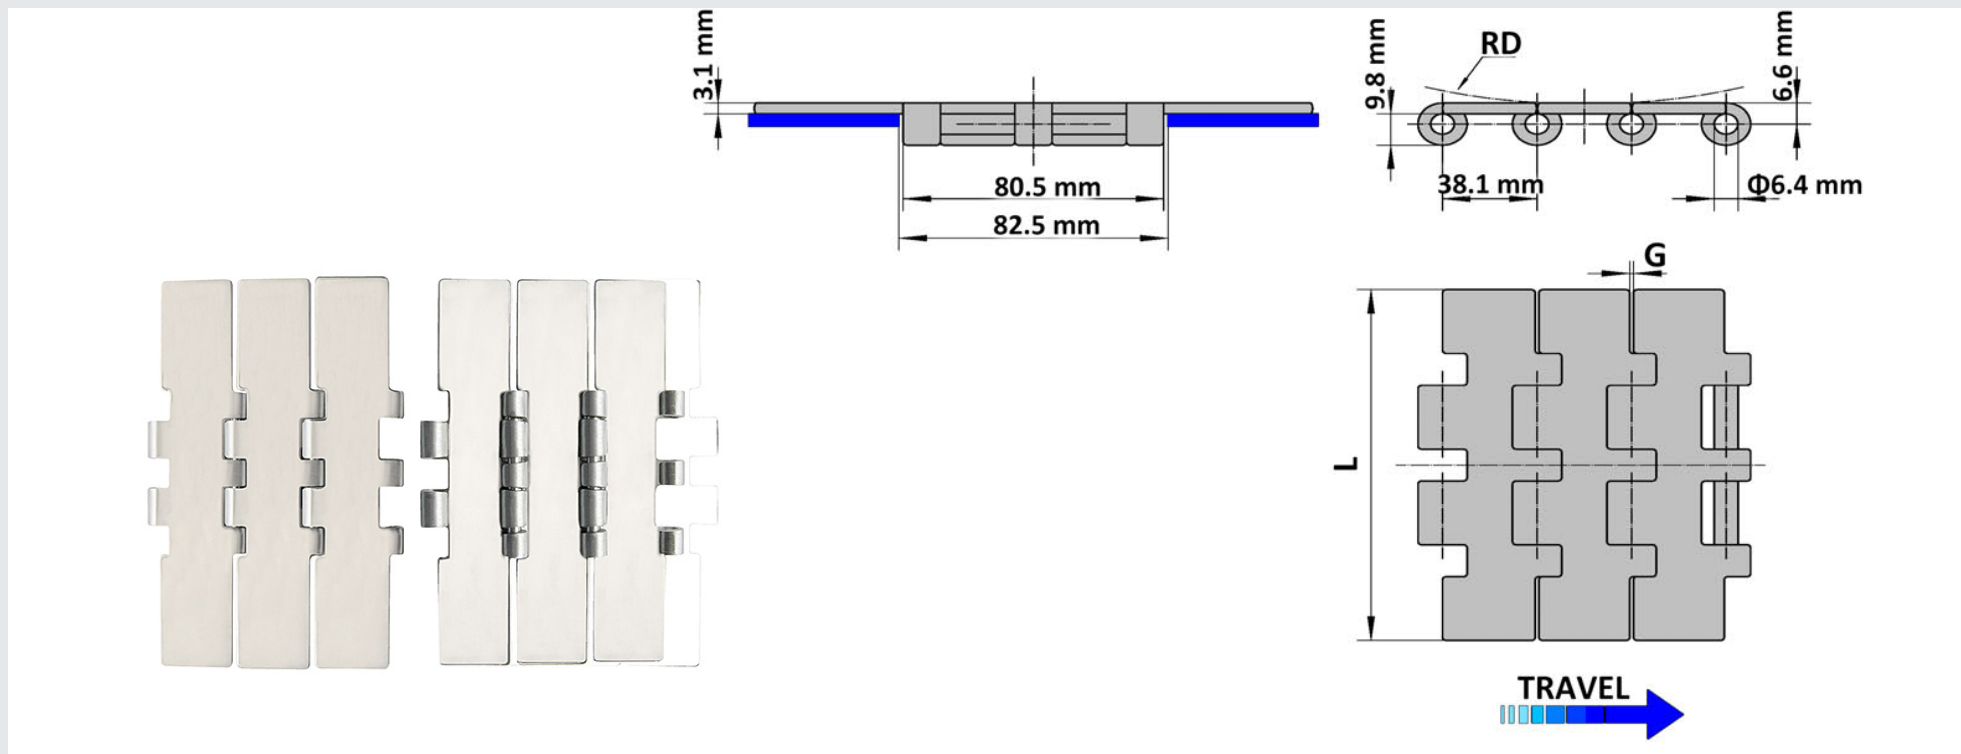


Item	Material	Chain Thickness	Chain Width	Pin Diameter	Pin Pitch	Mini. Backflex Radius	Pin overall width	Guide clearance
S800-K750	C45	0.12" (3.1 mm)	7.5" (190.5 mm)	0.25" (6.4 mm)	1.5" (38.1 mm)	5.9" (150 mm)	3.17" (80.5 mm)	3.25" (82.5 mm)
SR800-K750	C45	0.12" (3.1 mm)	7.5" (190.5 mm)	0.25" (6.4 mm)	1.5" (38.1 mm)	2.95" (75 mm)	3.17" (80.5 mm)	3.25" (82.5 mm)
SS802-K750	Standard	0.12" (3.1 mm)	7.5" (190.5 mm)	0.25" (6.4 mm)	1.5" (38.1 mm)	5.9" (150 mm)	3.17" (80.5 mm)	3.25" (82.5 mm)
SSR802-K750	Standard	0.12" (3.1 mm)	7.5" (190.5 mm)	0.25" (6.4 mm)	1.5" (38.1 mm)	2.95" (75 mm)	3.17" (80.5 mm)	3.25" (82.5 mm)
SSE805-K750	Extra plus	0.12" (3.1 mm)	7.5" (190.5 mm)	0.25" (6.4 mm)	1.5" (38.1 mm)	5.9" (150 mm)	3.17" (80.5 mm)	3.25" (82.5 mm)
SSER805-K750	Extra plus	0.12" (3.1 mm)	7.5" (190.5 mm)	0.25" (6.4 mm)	1.5" (38.1 mm)	2.95" (75 mm)	3.17" (80.5 mm)	3.25" (82.5 mm)
SSE805-K750HB	HB	0.12" (3.1 mm)	7.5" (190.5 mm)	0.25" (6.4 mm)	1.5" (38.1 mm)	5.9" (150 mm)	3.17" (80.5 mm)	3.25" (82.5 mm)
SSA805-K750	Austenitic	0.12" (3.1 mm)	7.5" (190.5 mm)	0.25" (6.4 mm)	1.5" (38.1 mm)	5.9" (150 mm)	3.17" (80.5 mm)	3.25" (82.5 mm)

Table 3: Straight Running Chains Heavy Duty Single Hinge

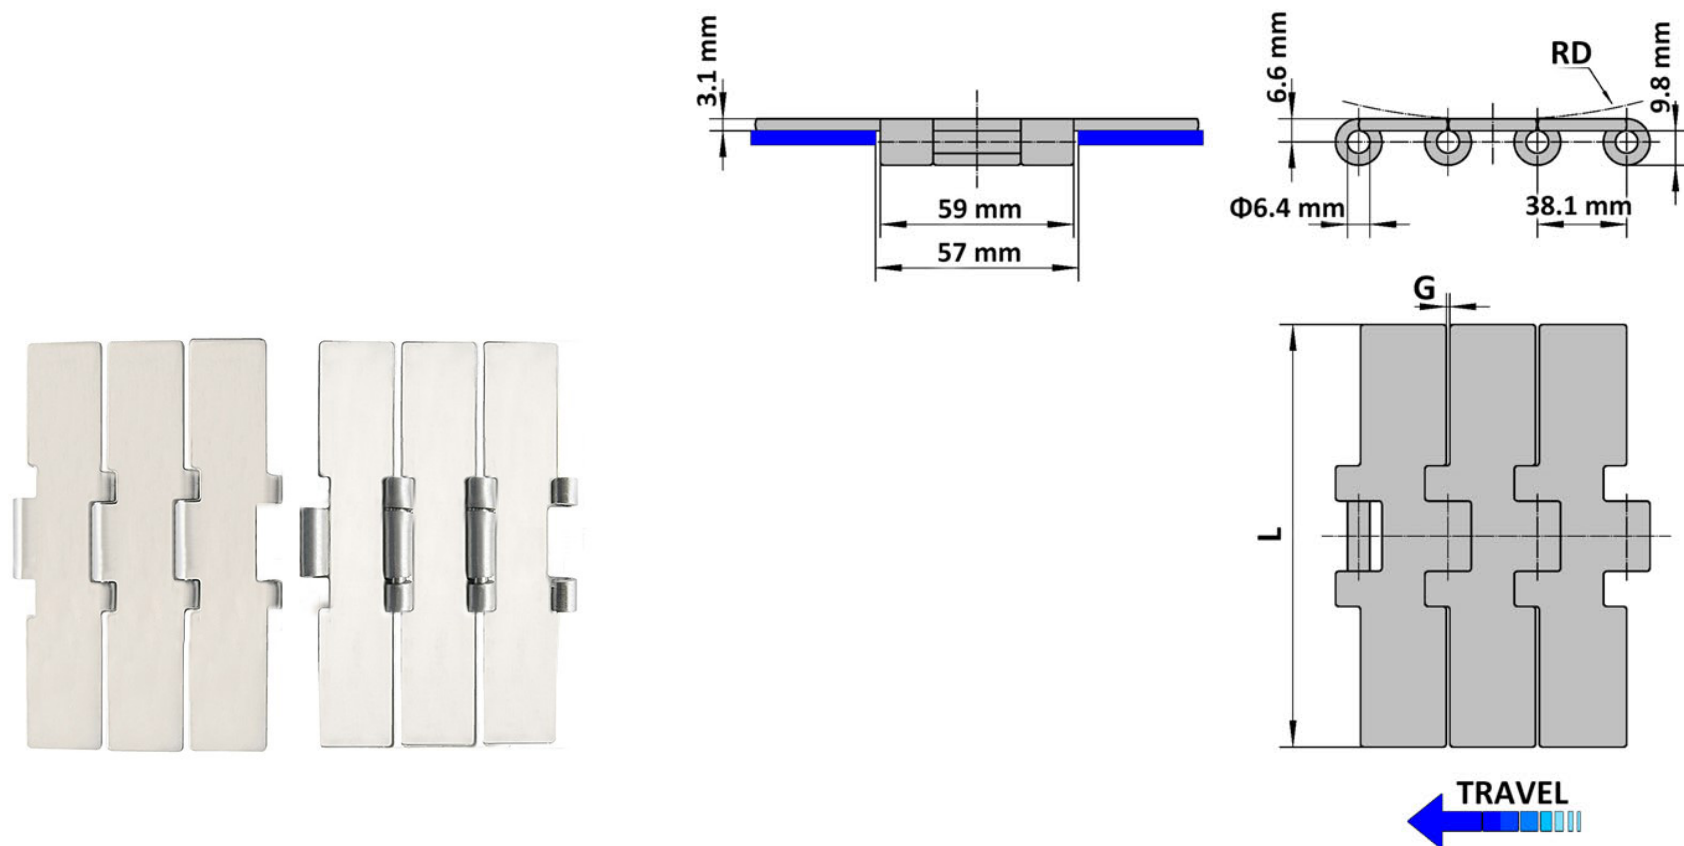

Item	Material	Chain Thickness	Chain Width	Pin Diameter	Pin Pitch	Mini. Backflex Radius	Pin overall width	Guide clearance
SSE8157-K750	Extra plus	0.12" (3.1 mm)	7.5" (190.5 mm)	0.25" (6.4 mm)	1.5" (38.1 mm)	5.9" (150 mm)	2.24 (57 mm)	2.32" (59 mm)
SSE8157-K750HB	HB	0.12" (3.1 mm)	7.5" (190.5 mm)	0.25" (6.4 mm)	1.5" (38.1 mm)	5.9" (150 mm)	2.24 (57 mm)	2.32" (59 mm)


Table 4: Straight Running Chains Single Hinge – Pitch 25.4 mm (1")

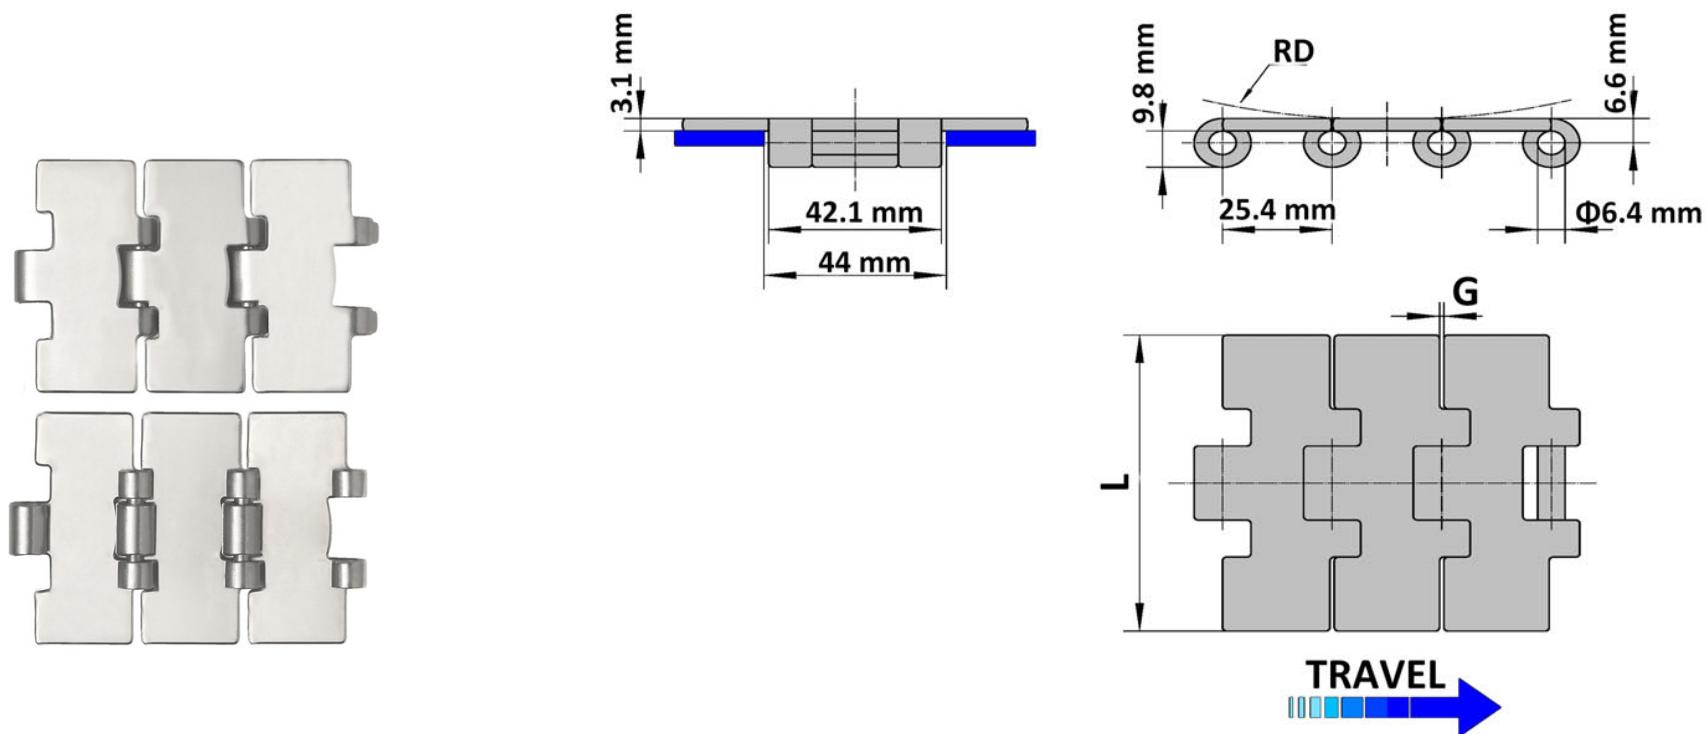

Item	Material	Chain Thickness	Chain Width	Pin Diameter	Pin Pitch	Mini. Backflex Radius	Pin overall width	Guide clearance
SSE515-K217	Extra	0.12" (3.1 mm)	2.17" (55 mm)	0.25" (6.4 mm)	1" (25.4 mm)	3.94" (100 mm)	1.66" (42.1 mm)	1.73" (44 mm)
SSE515-K236	Extra	0.12" (3.1 mm)	2.36" (60 mm)	0.25" (6.4 mm)	1" (25.4 mm)	3.94" (100 mm)	1.66" (42.1 mm)	1.73" (44 mm)
SSE515-K250	Extra	0.12" (3.1 mm)	2.5" (63.5 mm)	0.25" (6.4 mm)	1" (25.4 mm)	3.94" (100 mm)	1.66" (42.1 mm)	1.73" (44 mm)
SSE515-K283	Extra	0.12" (3.1 mm)	2.83" (72 mm)	0.25" (6.4 mm)	1" (25.4 mm)	3.94" (100 mm)	1.66" (42.1 mm)	1.73" (44 mm)
SSE515-K325	Extra	0.12" (3.1 mm)	3.25" (82.6 mm)	0.25" (6.4 mm)	1" (25.4 mm)	3.94" (100 mm)	1.66" (42.1 mm)	1.73" (44 mm)
SSE515-K350	Extra	0.12" (3.1 mm)	3.5" (88.9 mm)	0.25" (6.4 mm)	1" (25.4 mm)	3.94" (100 mm)	1.66" (42.1 mm)	1.73" (44 mm)
SSE515-K400	Extra	0.12" (3.1 mm)	4" (101.6 mm)	0.25" (6.4 mm)	1" (25.4 mm)	3.94" (100 mm)	1.66" (42.1 mm)	1.73" (44 mm)


Standard length: 120 pitches (10 ft. – 3.048 m)

Table 5: Sideflexing Chains – Bevel System

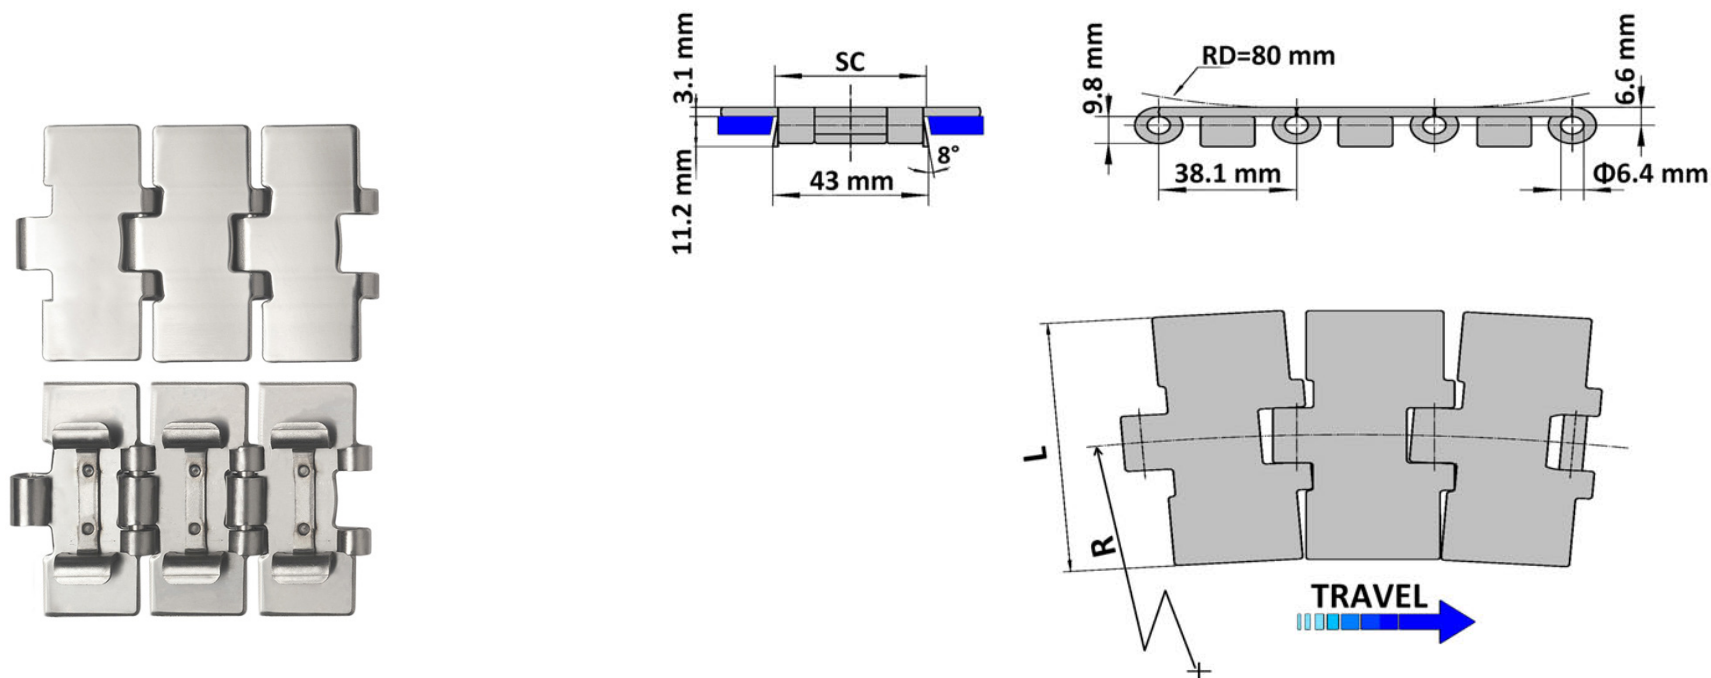


Item	Material	Chain Thickness	Chain Width	Pin Diameter	Pin Pitch	Mini. Sideflex Radius	Mini. Backflex Radius	Pin overall width	Guide clearance		Bevel angle
									Straight	curving	
SSE881-K325	Extra	0.12" (3.1 mm)	3.25" (82.6 mm)	0.25" (6.4 mm)	1.5" (38.1 mm)	19.69" (500 mm)	3.15" (80 mm)	1.69" (43 mm)	1.75" (44.5 mm)	1.63" (41.5 mm)	8°
SSE881-K450	Extra	0.12" (3.1 mm)	4.5" (114.3 mm)	0.25" (6.4 mm)	1.5" (38.1 mm)	19.69" (500 mm)	3.15" (80 mm)	1.69" (43 mm)	1.75" (44.5 mm)	1.63" (41.5 mm)	8°
SSE881-K750	Extra	0.12" (3.1 mm)	7.5" (190.5 mm)	0.25" (6.4 mm)	1.5" (38.1 mm)	19.69" (500 mm)	3.15" (80 mm)	1.69" (43 mm)	1.75" (44.5 mm)	1.63" (41.5 mm)	8°
SSA881-K325	Austenitic	0.12" (3.1 mm)	3.25" (82.6 mm)	0.25" (6.4 mm)	1.5" (38.1 mm)	19.69" (500 mm)	3.15" (80 mm)	1.69" (43 mm)	1.75" (44.5 mm)	1.63" (41.5 mm)	8°
SSA881-K450	Austenitic	0.12" (3.1 mm)	4.5" (114.3 mm)	0.25" (6.4 mm)	1.5" (38.1 mm)	19.69" (500 mm)	3.15" (80 mm)	1.69" (43 mm)	1.75" (44.5 mm)	1.63" (41.5 mm)	8°
SSA881-K750	Austenitic	0.12" (3.1 mm)	7.5" (190.5 mm)	0.25" (6.4 mm)	1.5" (38.1 mm)	19.69" (500 mm)	3.15" (80 mm)	1.69" (43 mm)	1.75" (44.5 mm)	1.63" (41.5 mm)	8°

Table 6: Sideflexing Chains – Bevel System

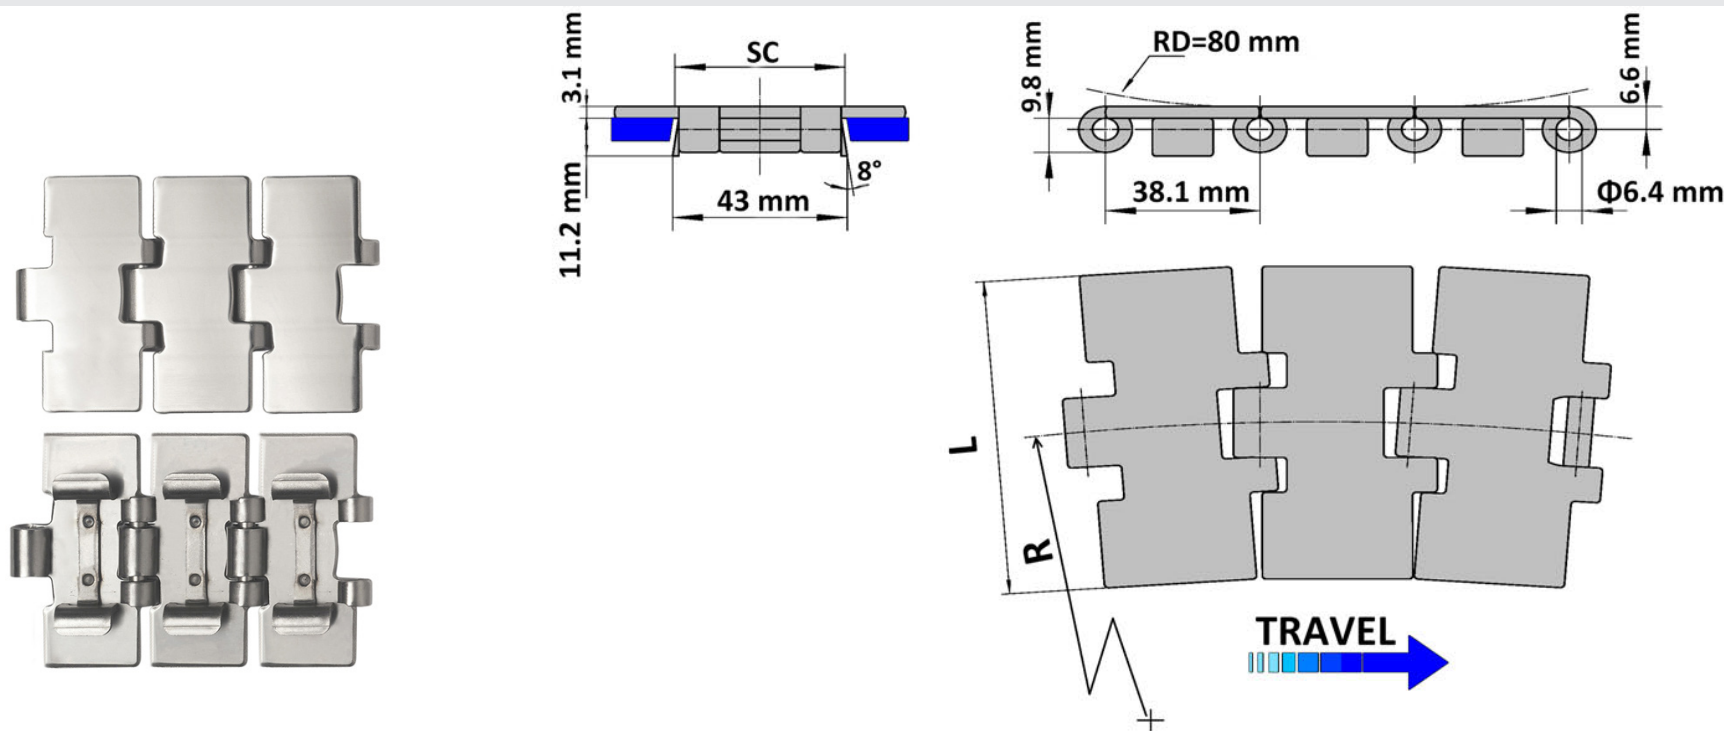


Item	Material	Chain Thickness	Chain Width	Pin Diameter	Pin Pitch	Mini. Sideflex Radius	Mini. Backflex Radius	Pin overall width	Guide clearance		Bevel angle
									Straight	curving	
SSE8810-K325	Extra plus	0.12" (3.1 mm)	3.25" (82.6 mm)	0.25" (6.4 mm)	1.5" (38.1 mm)	19.69" (500 mm)	3.15" (80 mm)	1.69" (43 mm)	1.75" (44.5 mm)	1.63" (41.5 mm)	8°
SSE8810-K350	Extra plus	0.12" (3.1 mm)	3.5" (88.9 mm)	0.25" (6.4 mm)	1.5" (38.1 mm)	19.69" (500 mm)	3.15" (80 mm)	1.69" (43 mm)	1.75" (44.5 mm)	1.63" (41.5 mm)	8°
SSE8810-K450	Extra plus	0.12" (3.1 mm)	4.5" (114.3 mm)	0.25" (6.4 mm)	1.5" (38.1 mm)	19.69" (500 mm)	3.15" (80 mm)	1.69" (43 mm)	1.75" (44.5 mm)	1.63" (41.5 mm)	8°
SSE8810-K750	Extra plus	0.12" (3.1 mm)	7.5" (190.5 mm)	0.25" (6.4 mm)	1.5" (38.1 mm)	19.69" (500 mm)	3.15" (80 mm)	1.69" (43 mm)	1.75" (44.5 mm)	1.63" (41.5 mm)	8°

Table 7: Sideflexing Chains – TAB System

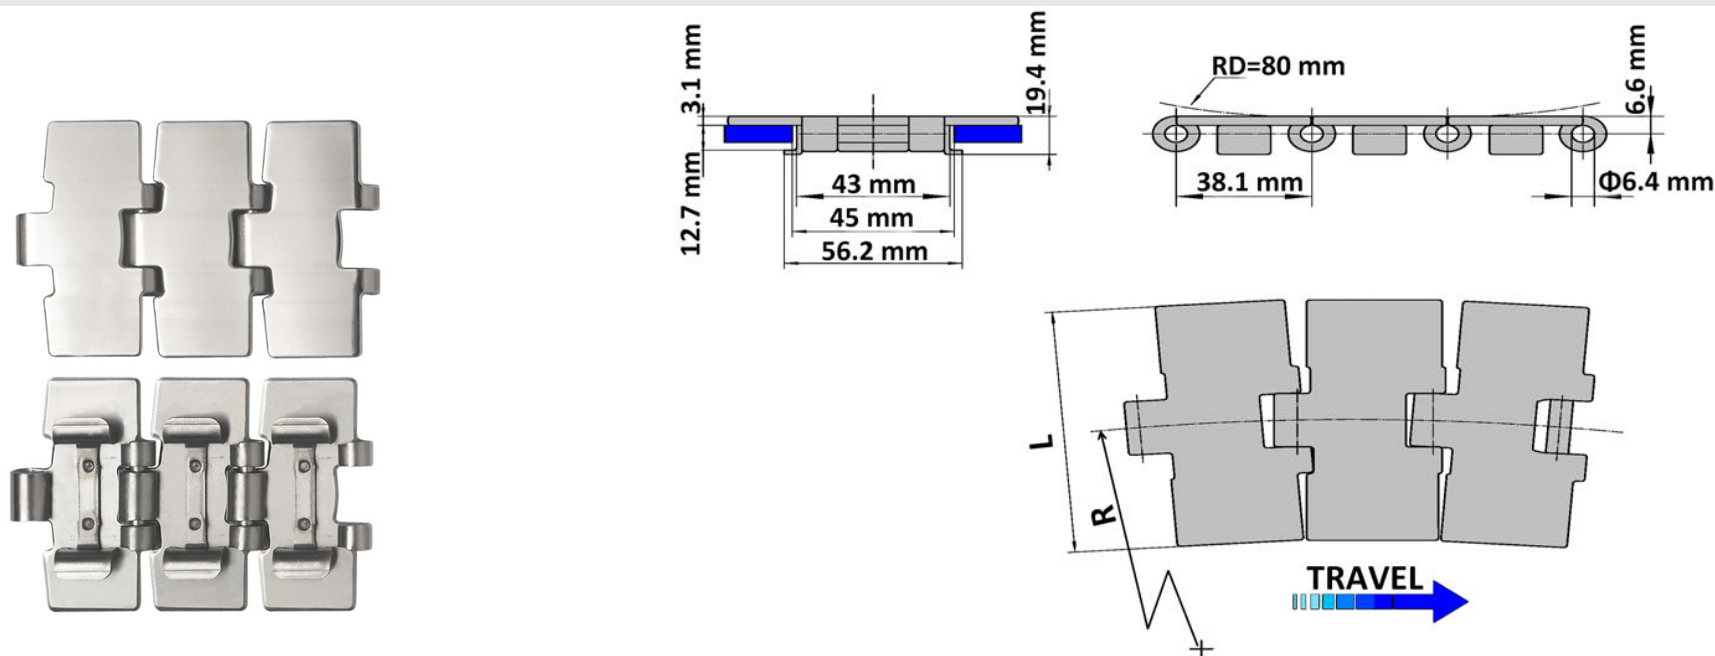





Item	Material	Chain Thickness	Chain Width	Pin Diameter	Pin Pitch	Mini. Sideflex Radius	Mini. Backflex Radius	Pin Overall Width	Guide Clearance Straight	Width Over TABs
SSE881-TAB-K325	Extra	0.12" (3.1 mm)	3.25" (82.6 mm)	0.25" (6.4 mm)	1.5" (38.1 mm)	19.69" (500 mm)	3.15" (80 mm)	1.69" (43 mm)	1.77" (45 mm)	2.21" (56 mm)
SSE881-TAB-K450	Extra	0.12" (3.1 mm)	4.5" (114.3 mm)	0.25" (6.4 mm)	1.5" (38.1 mm)	19.69" (500 mm)	3.15" (80 mm)	1.69" (43 mm)	1.77" (45 mm)	2.21" (56 mm)
SSE881-TAB-K750	Extra	0.12" (3.1 mm)	7.5" (190.5 mm)	0.25" (6.4 mm)	1.5" (38.1 mm)	19.69" (500 mm)	3.15" (80 mm)	1.69" (43 mm)	1.77" (45 mm)	2.21" (56 mm)
SSA881-TAB-K325	Austenitic	0.12" (3.1 mm)	3.25" (82.6 mm)	0.25" (6.4 mm)	1.5" (38.1 mm)	19.69" (500 mm)	3.15" (80 mm)	1.69" (43 mm)	1.77" (45 mm)	2.21" (56 mm)
SSA881-TAB-K450	Austenitic	0.12" (3.1 mm)	4.5" (114.3 mm)	0.25" (6.4 mm)	1.5" (38.1 mm)	19.69" (500 mm)	3.15" (80 mm)	1.69" (43 mm)	1.77" (45 mm)	2.21" (56 mm)
SSE881-TAB-K325	Austenitic	0.12" (3.1 mm)	7.5" (190.5 mm)	0.25" (6.4 mm)	1.5" (38.1 mm)	19.69" (500 mm)	3.15" (80 mm)	1.69" (43 mm)	1.77" (45 mm)	2.21" (56 mm)

Table 8: Sideflexing Chains – TAB System

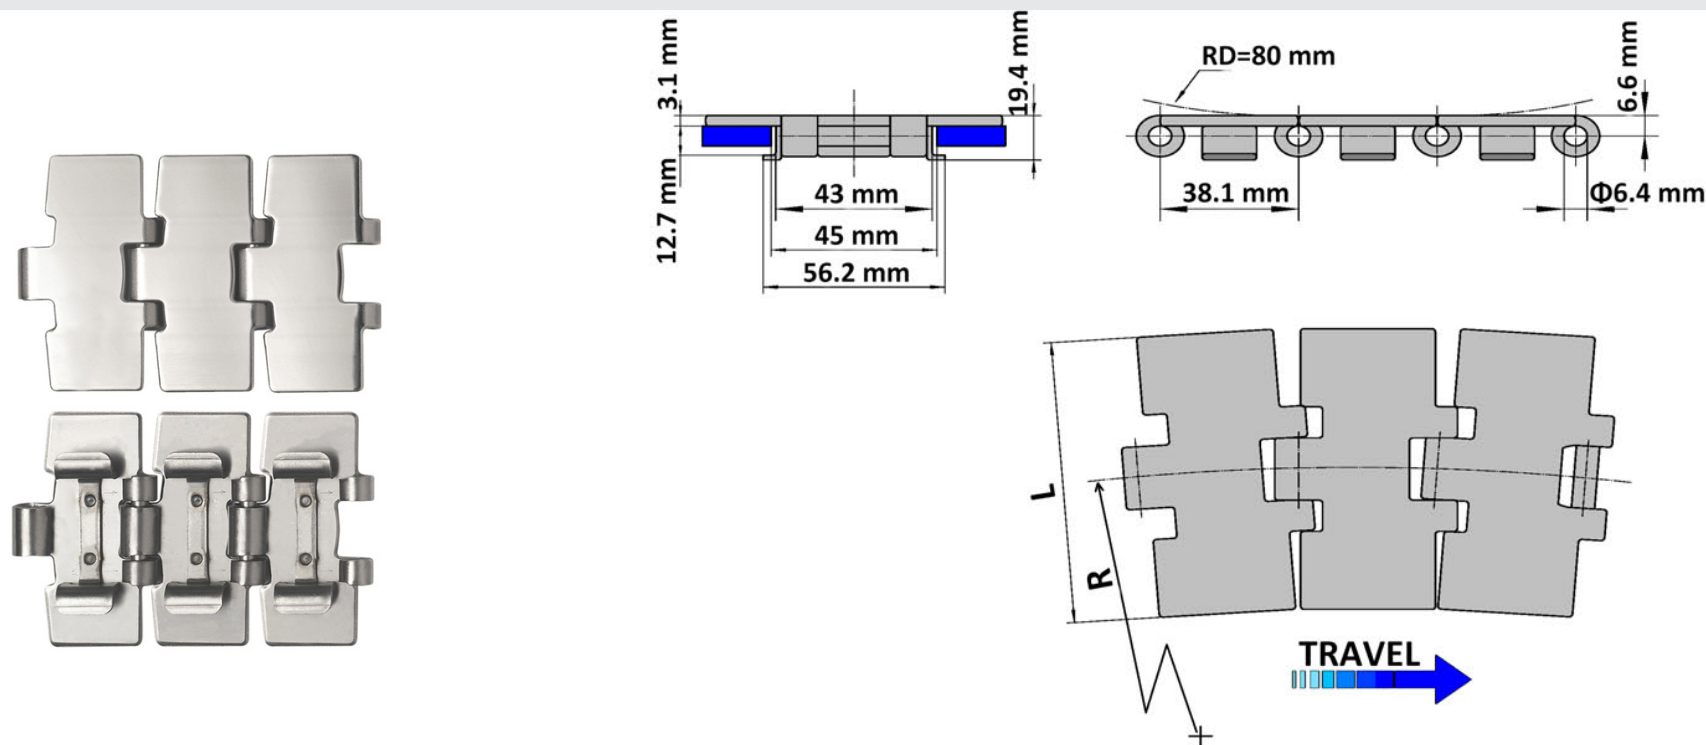

Item	Material	Chain Thickness	Chain Width	Pin Diameter	Pin Pitch	Mini. Sideflex Radius	Mini. Backflex Radius	Pin Overall Width	Guide Clearance Straight	Width Over TABs
SSE8810-TAB-K325	Extra plus	0.12" (3.1 mm)	3.25" (82.6 mm)	0.25" (6.4 mm)	1.5" (38.1 mm)	19.69" (500 mm)	3.15" (80 mm)	1.69" (43 mm)	1.77" (45 mm)	2.21" (56 mm)
SSE8810-TAB-K350	Extra plus	0.12" (3.1 mm)	3.5" (88.9 mm)	0.25" (6.4 mm)	1.5" (38.1 mm)	19.69" (500 mm)	3.15" (80 mm)	1.69" (43 mm)	1.77" (45 mm)	2.21" (56 mm)
SSE8810-TAB-K450	Extra plus	0.12" (3.1 mm)	4.5" (114.3 mm)	0.25" (6.4 mm)	1.5" (38.1 mm)	19.69" (500 mm)	3.15" (80 mm)	1.69" (43 mm)	1.77" (45 mm)	2.21" (56 mm)
SSE8810-TAB-K750	Extra plus	0.12" (3.1 mm)	7.5" (190.5 mm)	0.25" (6.4 mm)	1.5" (38.1 mm)	19.69" (500 mm)	3.15" (80 mm)	1.69" (43 mm)	1.77" (45 mm)	2.21" (56 mm)


Table 9: Sideflexing Chains for Magnetic System

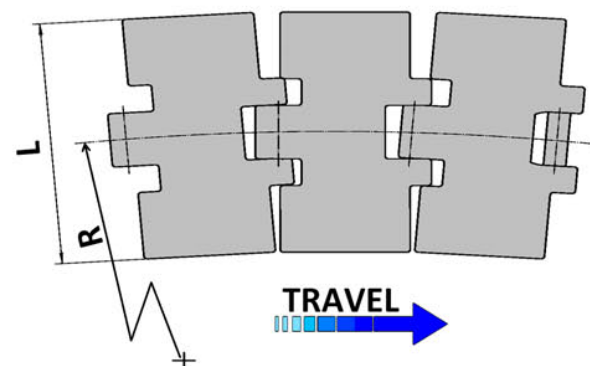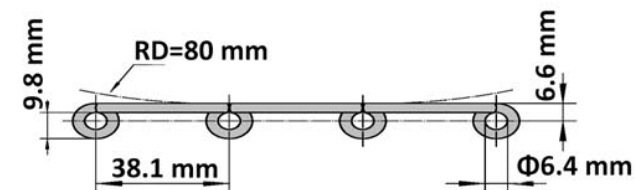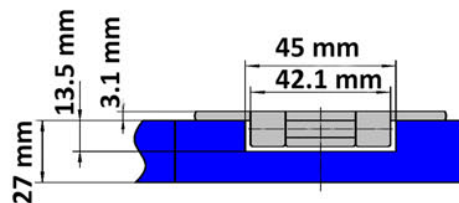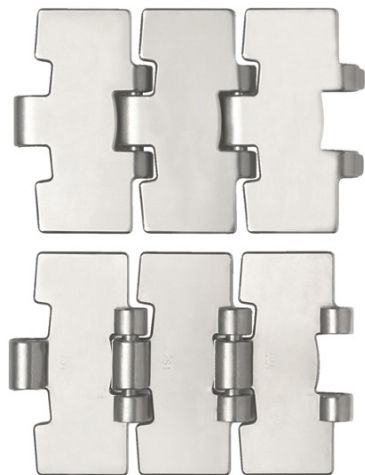

Item	Material	Chain Thickness	Chain Width	Pin Diameter	Pin Pitch	Mini. Sideflex Radius	Mini. Backflex Radius	Pin overall width	Guide clearance
SS881-MO-K325	Standard	0.12" (3.1 mm)	3.25" (82.6 mm)	0.25" (6.4 mm)	1.5" (38.1 mm)	19.69" (500 mm)	3.15" (80 mm)	1.66" (42.1 mm)	1.77" (45 mm)
SS881-MO-K330	Standard	0.12" (3.1 mm)	3.3" (88.9 mm)	0.25" (6.4 mm)	1.5" (38.1 mm)	19.69" (500 mm)	3.15" (80 mm)	1.66" (42.1 mm)	1.77" (45 mm)
SS881-M-K450	Standard	0.12" (3.1 mm)	4.5" (114.3 mm)	0.25" (6.4 mm)	1.5" (38.1 mm)	17.99" (457 mm)	3.15" (80 mm)	1.66" (42.1 mm)	1.77" (45 mm)
SS881-M-K750	Standard	0.12" (3.1 mm)	7.5" (190.5 mm)	0.25" (6.4 mm)	1.5" (38.1 mm)	17.99" (457 mm)	3.15" (80 mm)	1.66" (42.1 mm)	1.77" (45 mm)
SSE881-MO-K325	Extra plus	0.12" (3.1 mm)	3.25" (82.6 mm)	0.25" (6.4 mm)	1.5" (38.1 mm)	19.69" (500 mm)	3.15" (80 mm)	1.66" (42.1 mm)	1.77" (45 mm)
SSE881-MO-K330	Extra plus	0.12" (3.1 mm)	3.3" (88.9 mm)	0.25" (6.4 mm)	1.5" (38.1 mm)	19.69" (500 mm)	3.15" (80 mm)	1.66" (42.1 mm)	1.77" (45 mm)
SSE881-M-K450	Extra plus	0.12" (3.1 mm)	4.5" (114.3 mm)	0.25" (6.4 mm)	1.5" (38.1 mm)	17.99" (457 mm)	3.15" (80 mm)	1.66" (42.1 mm)	1.77" (45 mm)
SSE881-M-K750	Extra plus	0.12" (3.1 mm)	7.5" (190.5 mm)	0.25" (6.4 mm)	1.5" (38.1 mm)	17.99" (457 mm)	3.15" (80 mm)	1.66" (42.1 mm)	1.77" (45 mm)
SSE881-MO-K325HB	Extra plus HB	0.12" (3.1 mm)	3.25" (82.6 mm)	0.25" (6.4 mm)	1.5" (38.1 mm)	19.69" (500 mm)	3.15" (80 mm)	1.66" (42.1 mm)	1.77" (45 mm)
SSE881-MO-K330HB	Extra plus HB	0.12" (3.1 mm)	3.3" (88.9 mm)	0.25" (6.4 mm)	1.5" (38.1 mm)	19.69" (500 mm)	3.15" (80 mm)	1.66" (42.1 mm)	1.77" (45 mm)

Standard length: 80 pitches (10 ft. – 3.048 m)

Table 10: (Speed-Line) Sideflexing Chains for Magnetic System

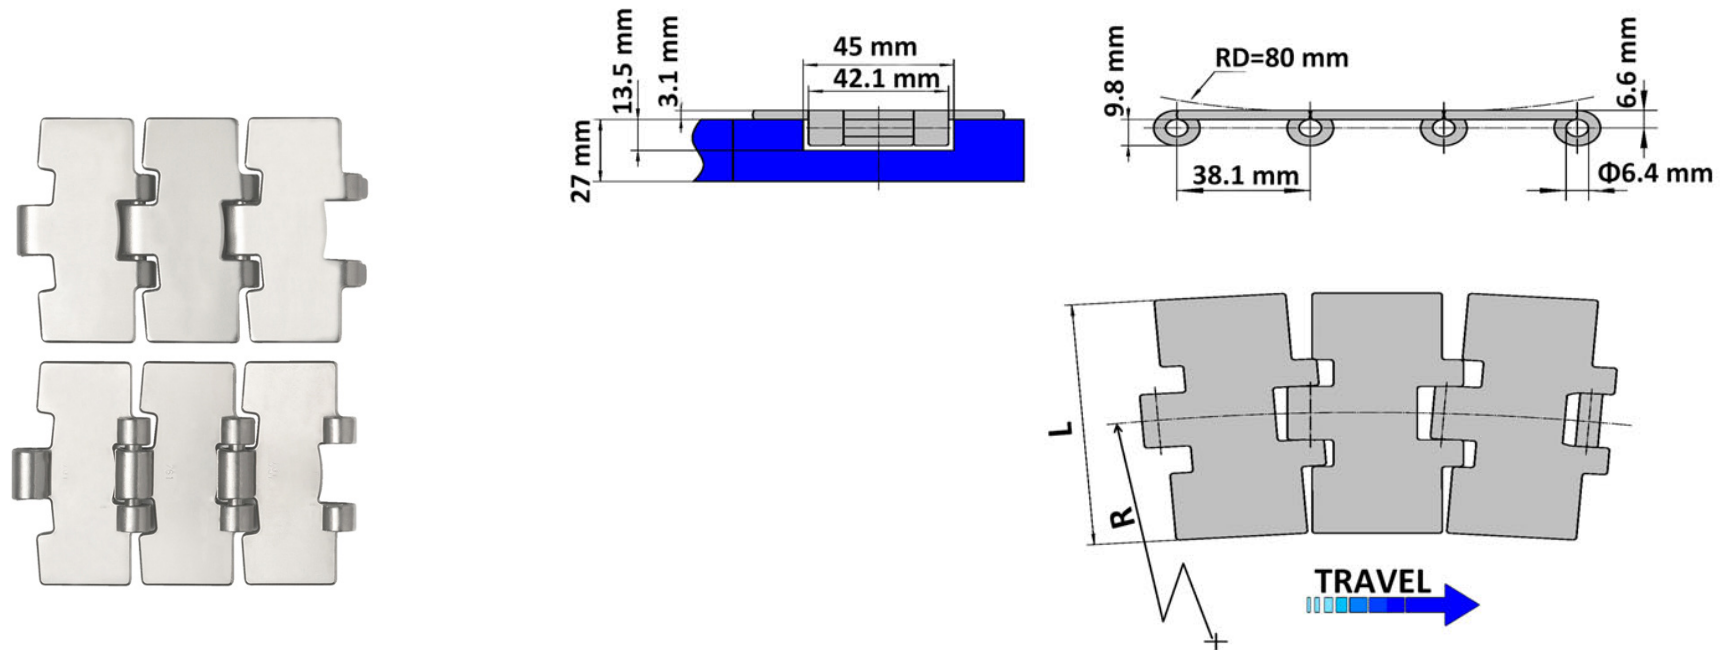

L881 MO Sideflexing Chains for Magnetic System



Item	Material	Chain Thickness	Chain Width	Pin Diameter	Pin Pitch	Mini. Sideflex Radius	Mini. Backflex Radius	Pin overall width	Guide clearance
SSL881-MO-K325	Standard	0.12" (3.1 mm)	3.25" (82.6 mm)	0.25" (6.4 mm)	1.5" (38.1 mm)	19.69" (500 mm)	3.15" (80 mm)	1.66" (42.1 mm)	1.77" (45 mm)
SSEL881-MO-K325	Extra plus	0.12" (3.1 mm)	3.25" (82.6 mm)	0.25" (6.4 mm)	1.5" (38.1 mm)	19.69" (500 mm)	3.15" (80 mm)	1.66" (42.1 mm)	1.77" (45 mm)
SSE881-MO-K325HB	Extra plus HB	0.12" (3.1 mm)	3.25" (82.6 mm)	0.25" (6.4 mm)	1.5" (38.1 mm)	19.69" (500 mm)	3.15" (80 mm)	1.66" (42.1 mm)	1.77" (45 mm)

L881 MO Speed-Line Sideflexing Chains for Magnetic System

SPSL881-MO-K325	Extra plus	0.12" (3.1 mm)	3.25" (82.6 mm)	0.25" (6.4 mm)	1.5" (38.1 mm)	19.69" (500 mm)	3.15" (80 mm)	1.66" (42.1 mm)	1.77" (45 mm)
SPSL881-MO-K330	Extra plus	0.12" (3.1 mm)	3.3" (88.9 mm)	0.25" (6.4 mm)	1.5" (38.1 mm)	19.69" (500 mm)	3.15" (80 mm)	1.66" (42.1 mm)	1.77" (45 mm)
SPSL881-MO-K325HB	Extra plus HB	0.12" (3.1 mm)	3.25" (82.6 mm)	0.25" (6.4 mm)	1.5" (38.1 mm)	19.69" (500 mm)	3.15" (80 mm)	1.66" (42.1 mm)	1.77" (45 mm)
SPSL881-MO-K330HB	Extra plus HB	0.12" (3.1 mm)	3.3" (88.9 mm)	0.25" (6.4 mm)	1.5" (38.1 mm)	19.69" (500 mm)	3.15" (80 mm)	1.66" (42.1 mm)	1.77" (45 mm)


Standard length: 80 pitches (10 ft. – 3.048 m)

Table 11: Sideflexing Chains for Magnetic System – Heavy Duty

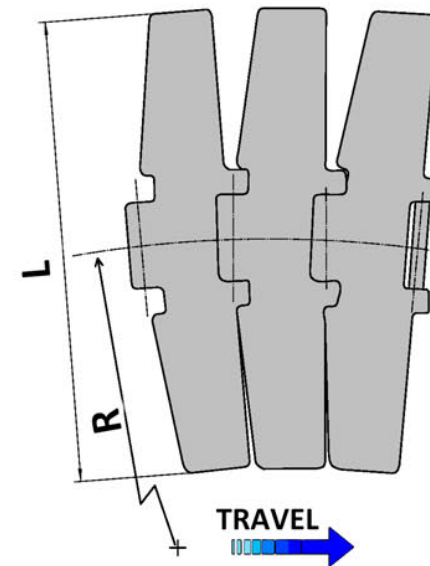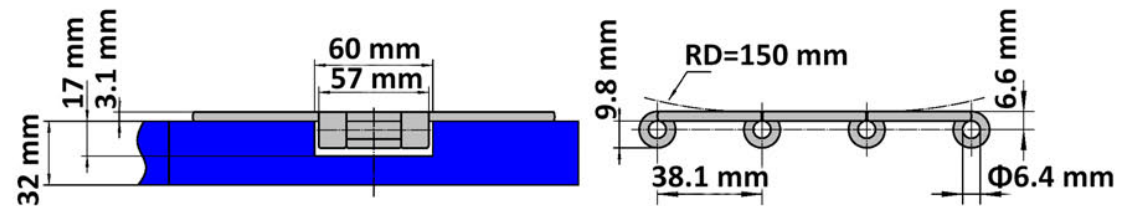

Item	Material	Chain Thickness	Chain Width	Pin Diameter	Pin Pitch	Mini. Sideflex Radius	Mini. Backflex Radius	Pin overall width	Guide clearance
SSE8857-M-K750	Extra Plus	0.12" (3.1 mm)	7.5" (190.5 mm)	0.25" (6.4 mm)	1.5" (38.1 mm)	29.53" (750 mm)	5.9" (150 mm)	2.24" (57 mm)	2.36" (60 mm)
SSE8857-M-K750HB	HB	0.12" (3.1 mm)	7.5" (190.5 mm)	0.25" (6.4 mm)	1.5" (38.1 mm)	29.53" (750 mm)	5.9" (150 mm)	2.24" (57 mm)	2.36" (60 mm)

Table 12: Sideflexing Chains – Heavy Duty

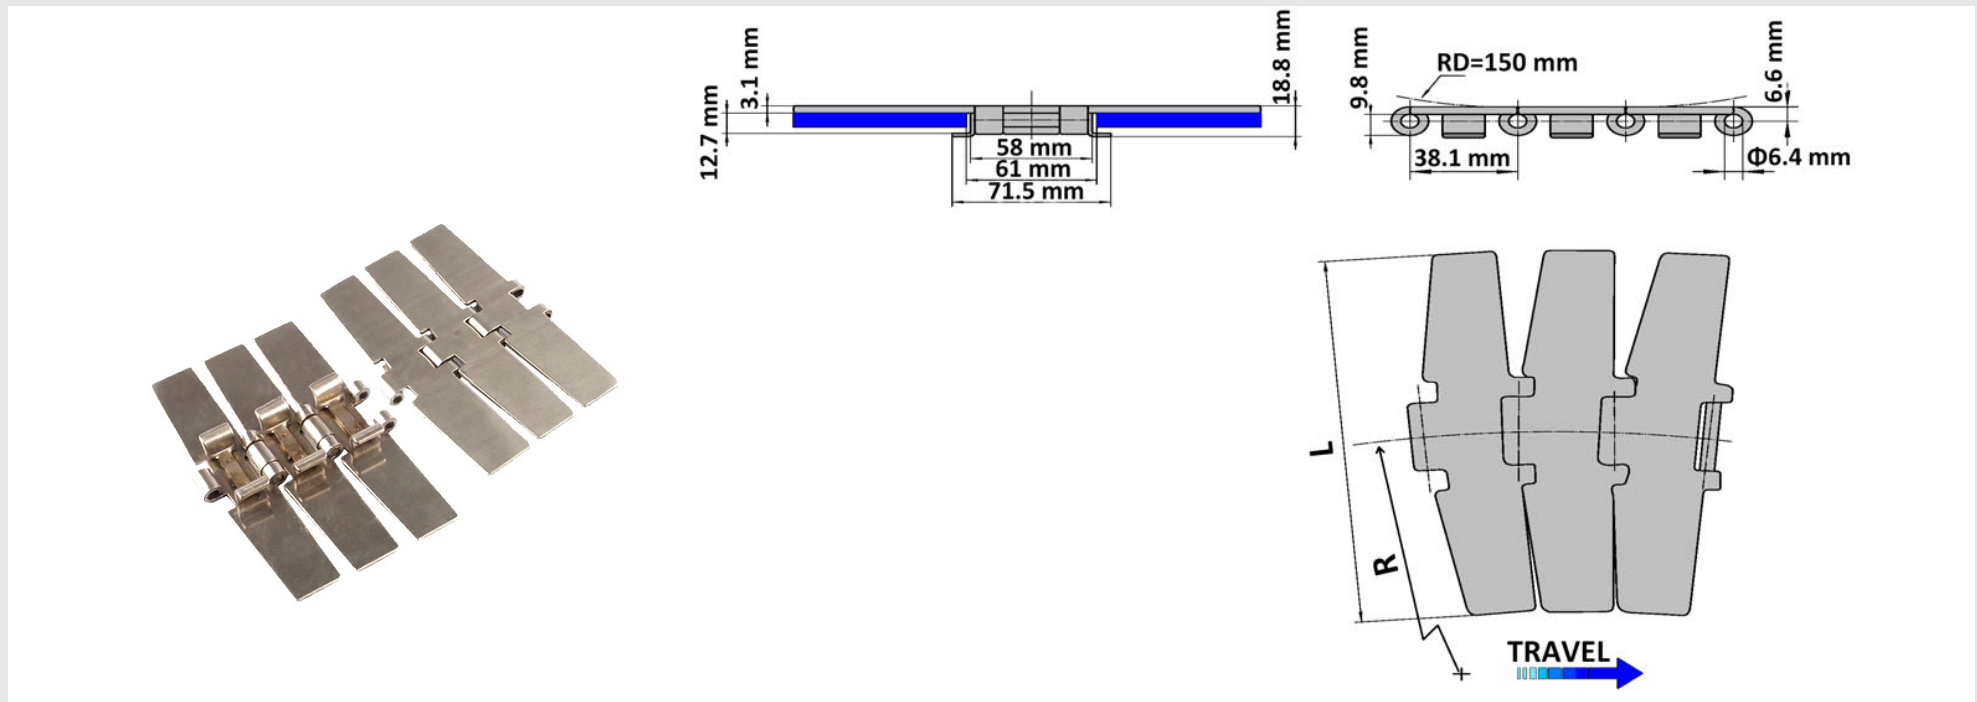

Item	Material	Chain Thickness	Chain Width	Pin Diameter	Pin Pitch	Mini. Sideflex Radius	Mini. Backflex Radius	Pin overall width	Guide Clearance Straight	Width Over TABs
SSE8857-TAB-K750	Extra plus	0.12" (3.1 mm)	7.5" (190.5 mm)	0.25" (6.4 mm)	1.5" (38.1 mm)	29.53" (750 mm)	5.9" (150 mm)	2.28" (58 mm)	2.40" (61 mm)	2.81" (71.5 mm)
SSE8857-TAB-K750HB	HB	0.12" (3.1 mm)	7.5" (190.5 mm)	0.25" (6.4 mm)	1.5" (38.1 mm)	29.53" (750 mm)	5.9" (150 mm)	1.69" (43 mm)	1.75" (44.5 mm)	1.63" (41.5 mm)



Boegger Industrial Limited

Add: East industrial Zone, Anping, Hebei, China 053600

TEL: +86-318-5111380

FAX: +86-318-5111390

Web: <http://www.steelconveyorbelt.com>

Mail: sales@steelconveyorbelt.com

Skype: sales.boegger